



सत्यमेव जयते  
MINISTRY OF SKILL DEVELOPMENT  
& ENTREPRENEURSHIP  
GOVERNMENT OF INDIA















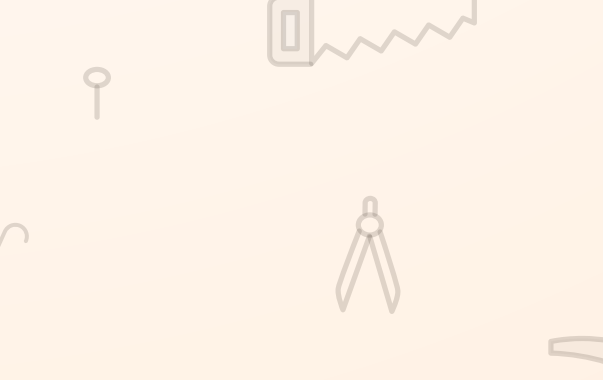
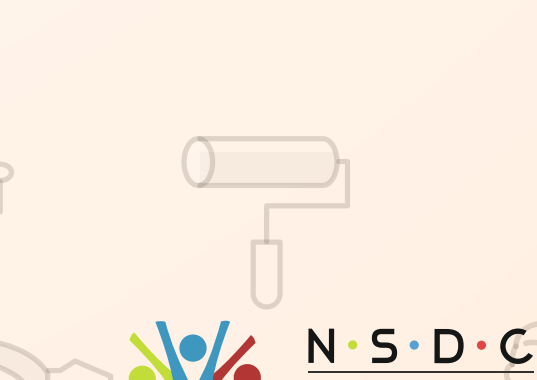
Skill India  
कौशल भारत - कुशल भारत




PMKVY  
PRADHAN MANTRI KAUSHAL YODHANA

EQUIPMENT LIST


False Ceiling & Dry Wall Installer(CON/Q1107)

1.	Measuring tape/Scale	x1 per learner	             
----	----------------------	----------------	---

2.	Dry wall T-Square	x10
3.	Pliers	x15
4.	Punch	x15
5.	Dry wall knife 12,6 and 4 inch	x1 per learner
6.	Dry wall Hammers	x10
7.	Sanding tool	x5
8.	Dry wall saw	x10
9.	Screw driver set	x10
10.	Screw gun	x5
11.	Drill machine	x5
12.	Metal cutter	x10
13.	Silicon gun/caulk gun	x5
14.	Stapler	x15
15.	Cup-lock scaffolding components (set)	x3
16.	Overalls	x1 per learner
17.	Safety helmets	x1 per learner
18.	Safety harness	x1 per learner
19.	Safety shoes	x1 per learner
20.	Safety Gloves	x1 per learner
21.	Safety goggles	x1 per learner



Construction Skill Development Council



N · S · D · C  
National  
Skill Development  
Corporation  
Transforming the skill landscape

## JOB ROLE OVERVIEW

### False Ceiling & Dry Wall Installer(CON/Q1107)

Role Description	This job holder performs installation and fixing of different false ceiling , wall partition and dry wall ceiling as per instructions under supervision
Version	1.0
NSQF Level	3
Minimum Educational Qualifications	Preferably 5th standard
Maximum Educational Qualifications	N.A
Training (Suggested but not mandatory)	Normal literacy of reading, writing and understanding
Minimum Job Entry Age	18 years
Experience	For Non trained worker : 5 years site experience in same occupation and for Trained worker: 2 years site experience as a certified Assistant False Ceiling and Dry Wall Installer

#### Applicable National Occupational Standards (NOS)

- CON/N1120: Carry out preparatory works and leveling procedure for fixing false ceiling
- CON/N1121: Install flush jointed ceiling system at construction site
- CON/N1122: Install exposed grid suspended panel ceiling system at construction site
- 
- CON/N8001: Work effectively in a team to deliver desired results at the workplace
- CON/N8002: Plan and organize work to meet expected outcomes
- CON/N9001: Work according to personal health, safety and environment protocol at construction site

#### Assessment Guidelines

- Criteria for assessment for each Qualification Pack will be created by the Sector Skill Council. Each Performance Criteria (PC) will be assigned marks proportional to its importance in NOS. SSC will also lay down proportion of marks for Theory and Skills Practical for each PC.
- The assessment for the knowledge part will be based on knowledge bank of questions created by Assessment Bodies subject to approval by SSC
- Individual assessment agencies will create unique question papers for knowledge/theory part for assessment of candidates as per assessment criteria given below
- Individual assessment agencies will create unique evaluations for skill practical for every student at each examination/training center based on assessment criteria.
- The passing percentage for each QP will be 50%. To pass the Qualification Pack, every trainee should score a minimum of 50% individually in each NOS.
- The Assessor shall check the final outcome of the practices while evaluating the steps performed to achieve the final outcome.
- The trainee shall be provided with a chance to repeat the test to correct his procedures in case of improper performance, with a deduction of marks for each iteration.
- After the certain number of iteration as decided by SSC the trainee is marked as fail, scoring zero marks for the procedure for the practical activity.
- In case of successfully passing only certain number of NOS's, the trainee is eligible to take subsequent assessment on the balance NOS's to pass the Qualification Pack within the specified timeframe set by SSC.
- Minimum duration of Assessment of each QP shall be of 4hrs/trainee.



